


## SPECIFICATION (50Hz)

Voltage (V)	230
Watt (W)	415
Amps (A)	1.78
Speed (rpm)	1300
Capacitor ( $\mu$ F)	10.00
Airflow ( $m^3/hr$ )	7200
Noise (dbA)	70
Net Weight (Kg) (With Basket Grill)	9.0

## PERFORMANCE CURVE

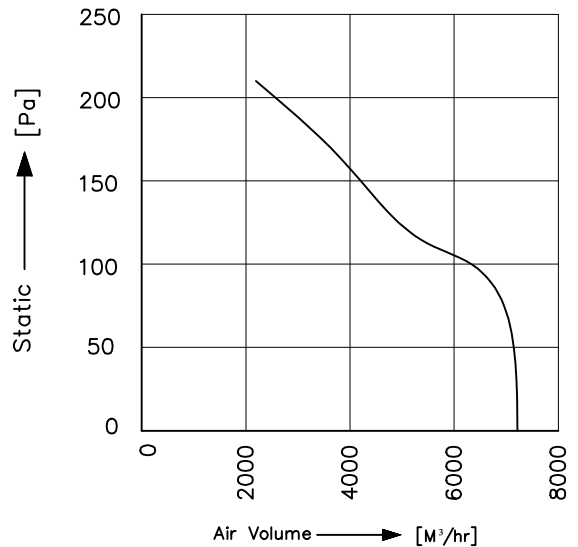

Conversion: 100pa  $\approx$  0.4" H2O    100m<sup>3</sup>/hr  $\approx$  60cfm

### \*Material :

- Blade: Steel, powder coated
- Grill: Steel, powder coated
- Rotor: Powder coated

\*Type of protection: IP-54

\*Insulation Class: "F"- Class

\*Bearing: Maintenance free Ball Bearing.


\*Permissible ambient temperature: 0 to 60° C

\*High Voltage test according to IS: 3588-1987

\*Balancing Grade: Fans conform 6.3 Grade as recommended by IS 1940-1-2003

\*Direction of rotation: Sucking- Counter clockwise  
Blowing- Clockwise, Seen on rotor

### \*Wiring Diagram :

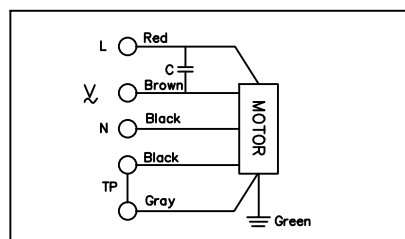

MODEL : AF500-4E-M3

SCALE: NTS | Page 1 of 1

REV/DATE: 04,08.07.2021

PREPARED BY : J.G.P

CHECKED BY : S.B.D

