



TECHNICAL DATA SHEET

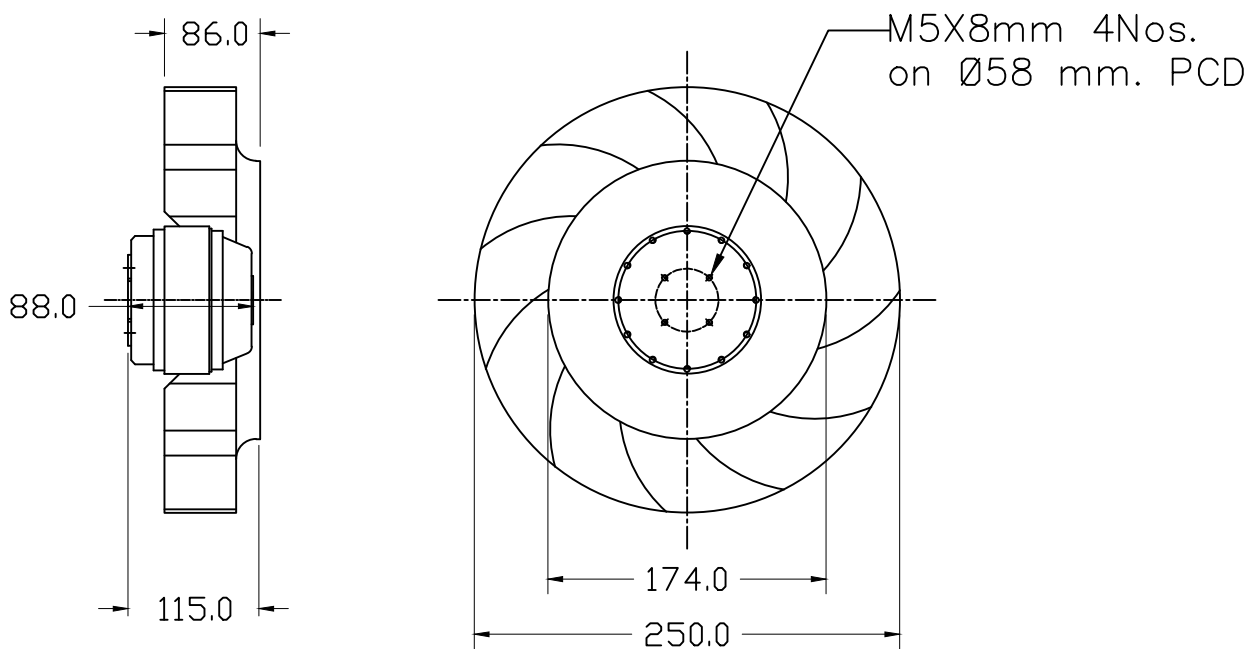

SPECIFICATION (50Hz)

| | |
|----------------------|------|
| Voltage (V) | 230 |
| Watt (W) | 127 |
| Amps (A) | 0.54 |
| Speed (rpm) | 2600 |
| Capacitor (μ F) | 4.00 |
| Airflow (m^3/hr) | 1400 |
| Noise (dbA) | 72 |
| Net Weight (Kg) | 2.6 |

PERFORMANCE CURVE

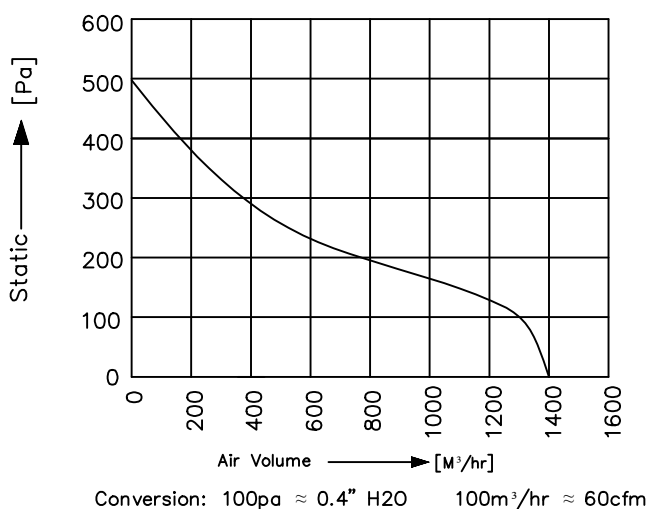

*Material :

-Impeller: Nylon6,30% Glass Filled

-Rotor: Powder coated

*Type of protection: IP-54

*Insulation Class: "F"- Class

*Bearing: Maintenance free Ball Bearing.


*Permissible ambient temperature: 0 to 60° C

*High Voltage test according to IS: 3588-1987

*Balancing Grade: Fans conform 6.3 Grade as recommended by IS 1940-1-2003

*Direction of rotation: Clockwise, Seen on rotor

*Wiring Diagram :



MODEL : BC250-2E-S3

SCALE: NTS Page 1 of 1

REV/DATE: 02,15.02.2016

PREPARED BY : J.G.P

CHECKED BY : S.B.D

