


SPECIFICATION (50Hz)

Voltage (V)	415
Watt (W)	135
Amps (A)	0.47
Speed (rpm)	1400
Capacitor (μ F)	---
Airflow (m^3/hr)	2000
Noise (dbA)	65
Net Weight (Kg)	4.9

PERFORMANCE CURVE

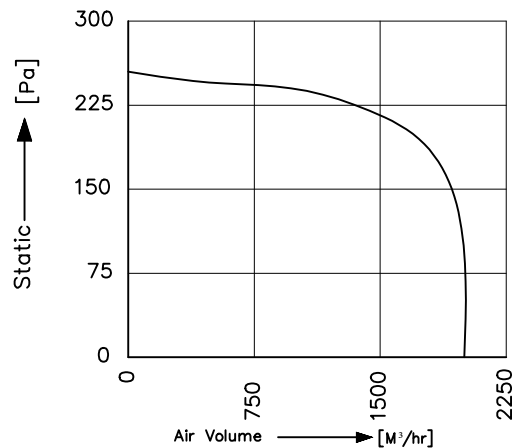

Conversion: 100pa \approx 0.4" H2O 100m³/hr \approx 60cfm

All information contained in this document is CONFIDENTIAL and the property of ROTECH. Reproduction of this any form is to be done with the specific permission of the company.

*Material :

- Impeller: Aluminum, Powder coated
- Rotor: Powder coated

*Type of protection: IP-54

*Motor thermally protected at 145° C

*Insulation Class: "F"- Class

*Bearing: Maintenance free Ball Bearing.


*Permissible ambient temperature: 0 to 60° C

*High Voltage test according to IS: 3588-1987

*Balancing Grade: Fans conform 6.3 Grade as recommended by IS 1940-1-2003

*Direction of rotation: Counter Clockwise, Seen on rotor

*Wiring Diagram :



NOTE: ALL DIMENSIONS ARE IN MM.

MODEL: BC315-4D-K3

SCALE: NTS | Page 1 of 1

REV/DATE: 04,01.11.2019

PREPARED BY : J.G.P

CHECKED BY : S.B.D

