


SPECIFICATION (50Hz)

Voltage (V)	415
Watt (W)	200
Amps (A)	0.43
Speed (rpm)	1400
Capacitor (μ F)	---
Airflow (m^3/hr)	2950
Noise (dbA)	72
Net Weight (Kg)	5.2

PERFORMANCE CURVE

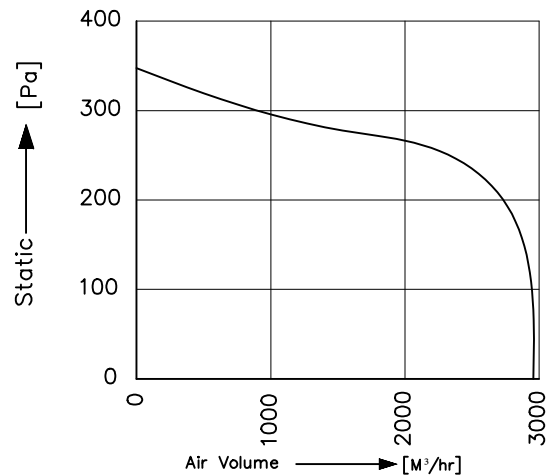

Conversion: 100pa \approx 0.4" H2O 100m³/hr \approx 60cfm

*Material :

-Impeller: Aluminum, Powder coated

-Rotor: Powder coated

*Type of protection: IP-44

*Motor thermally protected at 145° C

*Insulation Class: "F"- Class

*Bearing: Maintenance free Ball Bearing.


*Permissible ambient temperature: 0 to 60° C

*High Voltage test according to IS: 3588-1987

*Balancing Grade: Fans conform 6.3 Grade as recommended by IS 1940-1-2003

*Direction of rotation: Counter Clockwise, Seen on rotor

*Wiring Diagram :



MODEL: BC355-4D-K4

SCALE: NTS | Page 1 of 1

REV/DATE: 03,04.02.2017

PREPARED BY : J.G.P

CHECKED BY : S.B.D

