


## SPECIFICATION (50Hz)

Voltage (V)	415
Watt (W)	200
Amps (A)	0.70
Speed (rpm)	1400
Capacitor ( $\mu F$ )	---
Airflow ( $m^3/hr$ )	3000
Noise (dbA)	71
Net Weight (Kg)	5.0

## PERFORMANCE CURVE

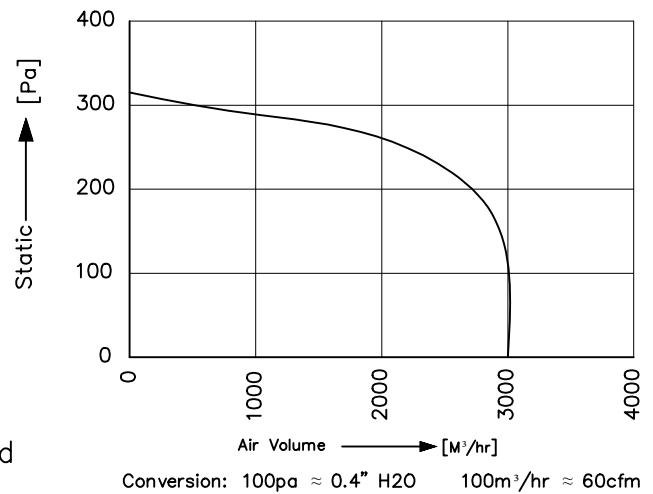

All information contained in this document is CONFIDENTIAL and the property of ROTECH. Reproduction of this any form is to be done with the specific permission of the company.

### \*Material :

- Impeller: Aluminum, Powder coated
- Rotor: Powder coated

\*Type of protection: IP-54

\*Motor thermally protected at 145° C

\*Insulation Class: "F"- Class

\*Bearing: Maintenance free Ball Bearing.


\*Permissible ambient temperature: 0 to 60° C

\*High Voltage test according to IS: 3588-1987

\*Balancing Grade: Fans conform 6.3 Grade as recommended by IS 1940-1-2003

\*Direction of rotation: Counter Clockwise, Seen on rotor

### \*Wiring Diagram :



MODEL: BC355-4D-K4

SCALE: NTS | Page 1 of 1

REV/DATE: 04,01.11.2019

PREPARED BY : J.G.P

CHECKED BY : S.B.D

