


SPECIFICATION (50Hz)

Voltage (V)	415
Watt (W)	400
Amps (A)	1.55
Speed (rpm)	1400
Capacitor (µF)	---
Airflow (m ³ /hr)	3800
Noise (db)	76
Net Weight (Kg)	8.9

PERFORMANCE CURVE

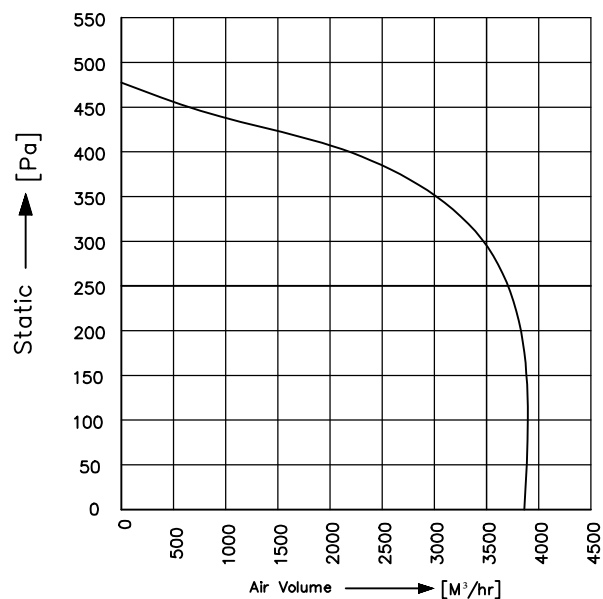


Conversion: 100pa ≈ 0.4" H2O 100m³/hr ≈ 60cfm

ROTECH Material :

- Impeller: Aluminum, powder coated
- Rotor: Powder coated
- *Type of protection: IP-55
- *Insulation Class: "F"- Class
- *Bearing: Maintenance free Ball Bearing.
- *Permissible ambient temperature: 0 to 60° C
- *High Voltage test according to IS: 3588-1987
- *Balancing Grade: Fans conform 6.3 Grade as recommended by IS 1940-1-2003
- *Direction of rotation: Clockwise, Seen on rotor

*Wiring Diagram :



MODEL: BC400-4D-M5

SCALE: NTS | Page 1 of 1

REV/DATE: 03,02.05.2017

PREPARED BY : J.G.P

CHECKED BY : S.B.D

