


## SPECIFICATION (50Hz)

Voltage (V)	230
Watt (W)	300
Amps (A)	1.25
Speed (rpm)	2600
Capacitor ( $\mu$ F)	5.0
Airflow ( $m^3/hr$ )	1750
Noise (dbA)	80
Net Weight (Kg)	8.0

## PERFORMANCE CURVE

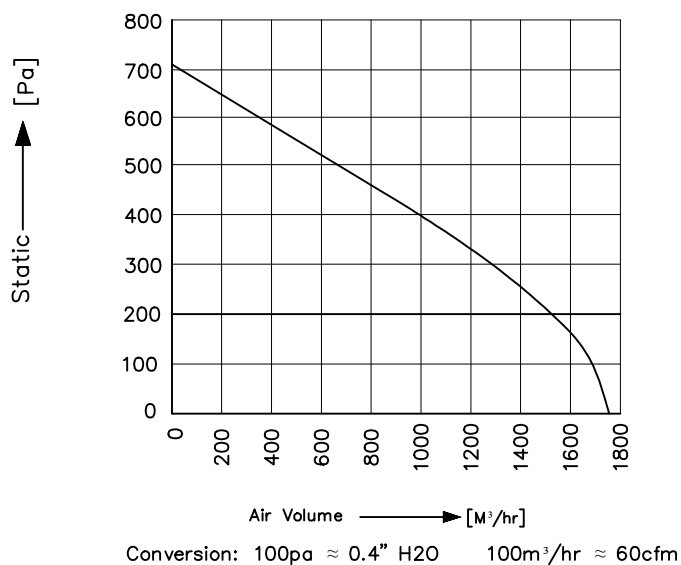

### \*Material :

- Impeller: Steel, Powder coated
- Rotor: Powder coated
- Housing: Steel, Powder coated

\*Type of protection: IP-44

\*Insulation Class: "F"- Class

\*Bearing: Maintenance free Ball Bearing.


\*Permissible ambient temperature: 0 to 60° C

\*High Voltage test according to IS: 3588-1987

\*Balancing Grade: Fans conform 6.3 Grade as recommended by IS 1940-1-2003

\*Direction of rotation: Clockwise, Seen on rotor

### \*Wiring Diagram :



MODEL : CI315-2E-K3

SCALE: NTS | Page 1 of 1

REV/DATE: 00,08.11.2017

PREPARED BY : J.G.P

CHECKED BY : S.B.D

