


SPECIFICATION (50Hz)

Voltage (V)	415
Watt (No Load) (W)	60
Watt (Rated) (W)	200
Amps (No Load) (A)	0.35
Amps (Rated) (A)	0.49
Speed (rpm)	1400
Capacitor (μ F)	----
Noise (dbA)	50
Net Weight (Kg)	3.5

- *Material :
- *Rotor: Aluminum Die cast with Powder coated
- *Type of protection: IP-54
- *Insulation Class: "F"- Class
- *Bearing: Maintenance free Ball Bearing.
- *Motor Protection: Thermal Protected
- *Permissible ambient temperature: 0 to 60° C
- *High Voltage test according to IS: 3588-1987
- *Cable length: 1.5 Sq.mm - 6 Core Wire, 600mm
- *Balancing Grade: Fans conform 6.3 Grade as recommended by IS 1940-1-2003
- *Direction of rotation: Sucking- Counter clockwise
Blowing- Clockwise, Seen on rotor

*Wiring Diagram :

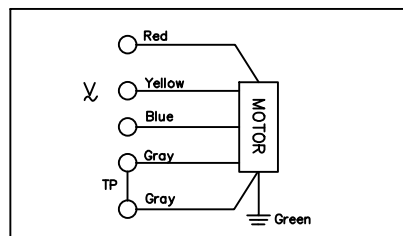

MODEL : M0102-4D-K4

SCALE: NTS | Page 1 of 1

REV/DATE: 00,26.03.2021

PREPARED BY : J.G.P

CHECKED BY : S.B.D

