


SPECIFICATION (50Hz)

| | |
|----------------------|------|
| Voltage (V) | 230 |
| Watt (No Load) (W) | 215 |
| Watt (Rated) (W) | 560 |
| Amps (No Load) (A) | 1.27 |
| Amps (Rated) (A) | 2.45 |
| Speed (rpm) | 1400 |
| Capacitor (μ F) | 12.0 |
| Noise (dbA) | 52 |
| Net Weight (Kg) | 6.0 |

- *Material :
- *Rotor: Aluminum Die cast with Powder coated
- *Type of protection: IP-55
- *Insulation Class: "F"- Class
- *Bearing: Maintenance free Ball Bearing.
- *Motor Protection: Thermal Protected
- *Permissible ambient temperature: 0 to 60° C
- *High Voltage test according to IS: 3588-1987
- *Cable length: 1.5 Sq.mm - 6 Core Wire, 600mm
- *Balancing Grade: Fans conform 6.3 Grade as recommended by IS 1940-1-2003
- *Direction of rotation: Sucking- Counter clockwise
Blowing- Clockwise, Seen on rotor

*Wiring Diagram :

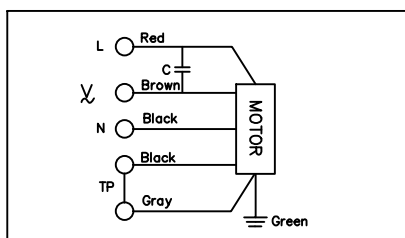

MODEL : M0138-4E-M5

SCALE: NTS Page 1 of 1

REV/DATE: 00,27.05.2021

PREPARED BY : J.G.P

CHECKED BY : S.B.D

