


SPECIFICATION (50Hz)

Voltage (V)	230
Watt (W)	155
Amps (A)	0.63
Speed (rpm)	2300
Capacitor (μ F)	4.0
Airflow (m^3/hr)	2150
Noise (dbA)	68
Net Weight (Kg) (With Bucket Grill)	3.3

PERFORMANCE CURVE

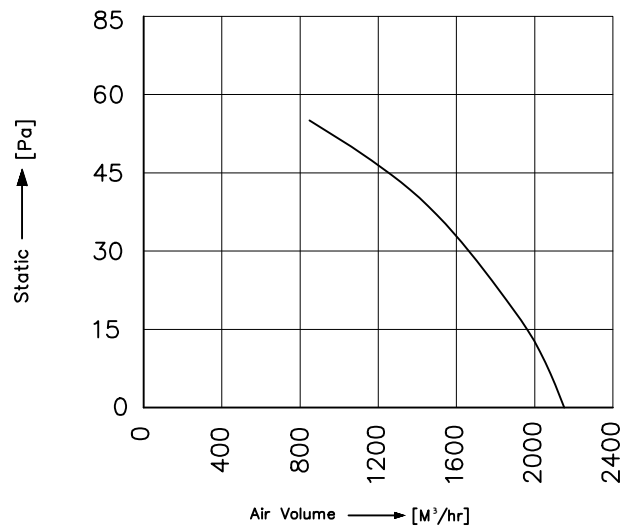

Conversion: 100pa \approx 0.4" H2O 100 $m^3/hr \approx$ 60cfm

All information contained in this document is CONFIDENTIAL and the property of ROTECH. Reproduction of this any form is to be done with the specific permission of the company.

*Material :

- Blade: Steel, powder coated
- Grill: Steel, powder coated
- Rotor: Powder coated

*Type of protection: IP-54

*Insulation Class: "F"- Class

*Bearing: Maintenance free Ball Bearing.

*Permissible ambient temperature: 0 to 60° C


*High Voltage test according to IS: 3588-1987

*Balancing Grade: Fans conform 6.3 Grade as recommended by IS 1940-1-2003

*Direction of rotation: Sucking- Counter clockwise

Blowing- Clockwise, Seen on rotor

*Wiring Diagram :



MODEL : AF300-2E-S3

SCALE: NTS | Page 1 of 1

REV/DATE: 00,16.10.2018

PREPARED BY : J.G.P

CHECKED BY : S.B.D

